


THERM-A-GUARD INSTALLATION INSTRUCTIONS

All Guard Installations

Trim top lead outlet rings to necessary size



Bend latch inward to insure a tight snap over latch fingers

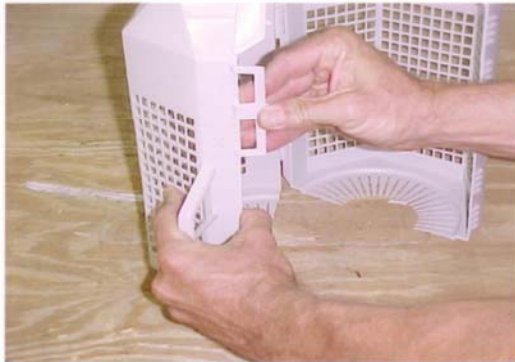


Trim bottom fingers to insure snug, but not overly tight, fit around bushing skirt or bushing cap



Side-Exit Lead Installations

Separate hinged halves by gently twisting the two halves apart at the hinge

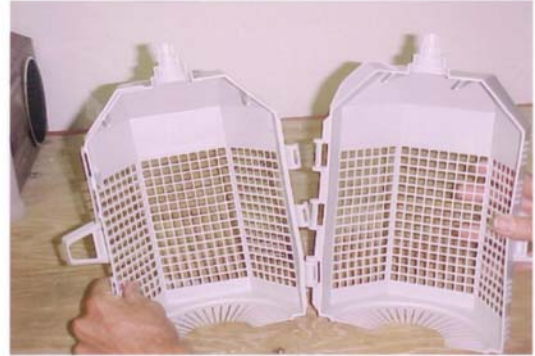

Trim hinge area for side-exit leads; one of the three hinges can be completely removed while still allowing proper function (Note: Remove area between hinges on Model #TGB-50007)



Re-snap hinges together and install guard around bushing skirt or bushing cap and latch securely in place



Please call (888) 388-4348 if you have any questions, comments and/or concerns